

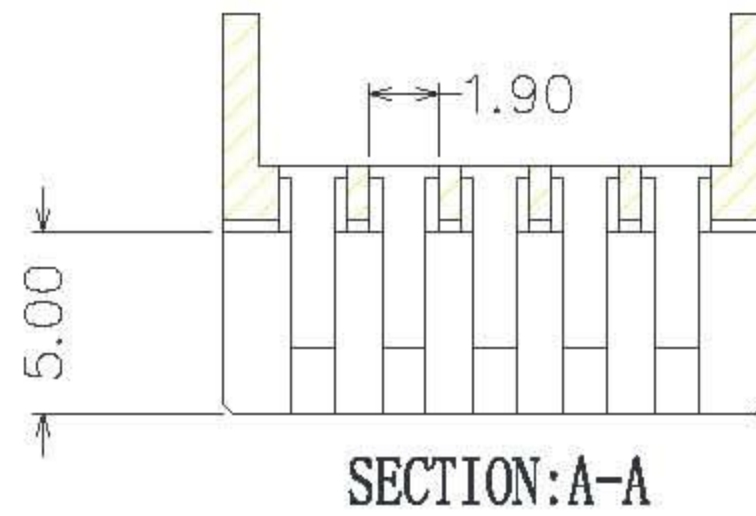
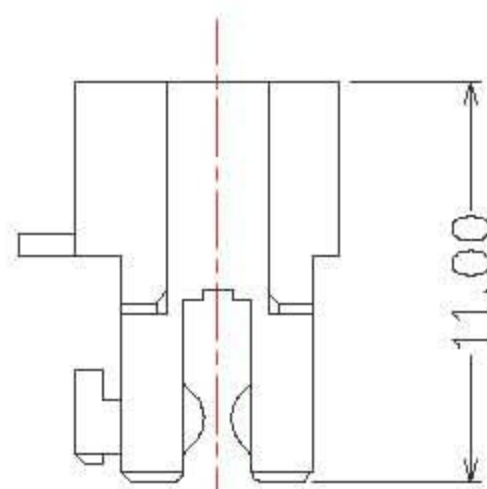
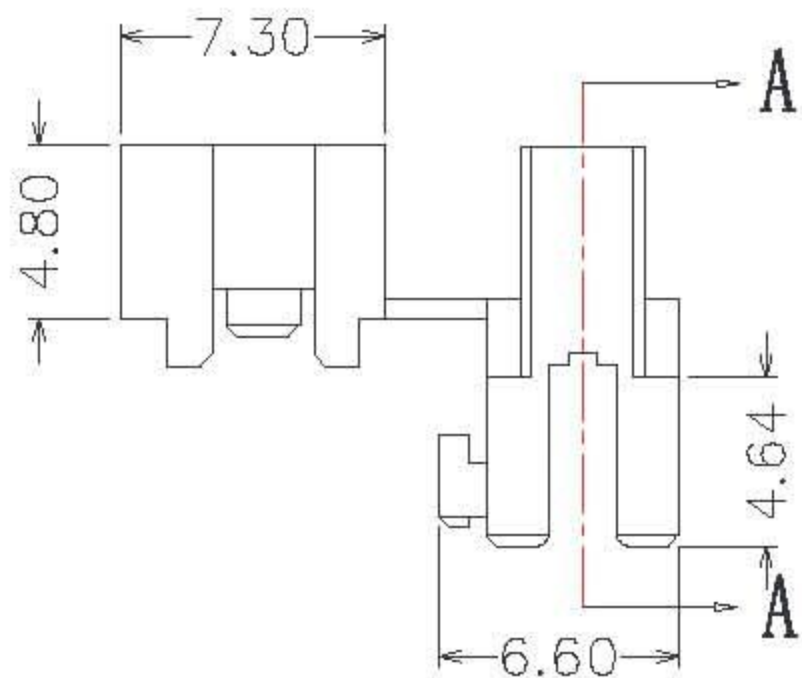
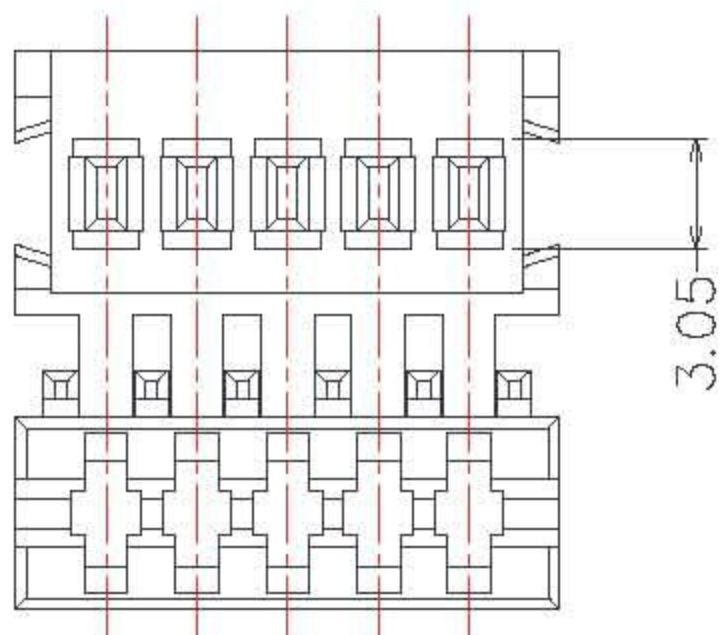


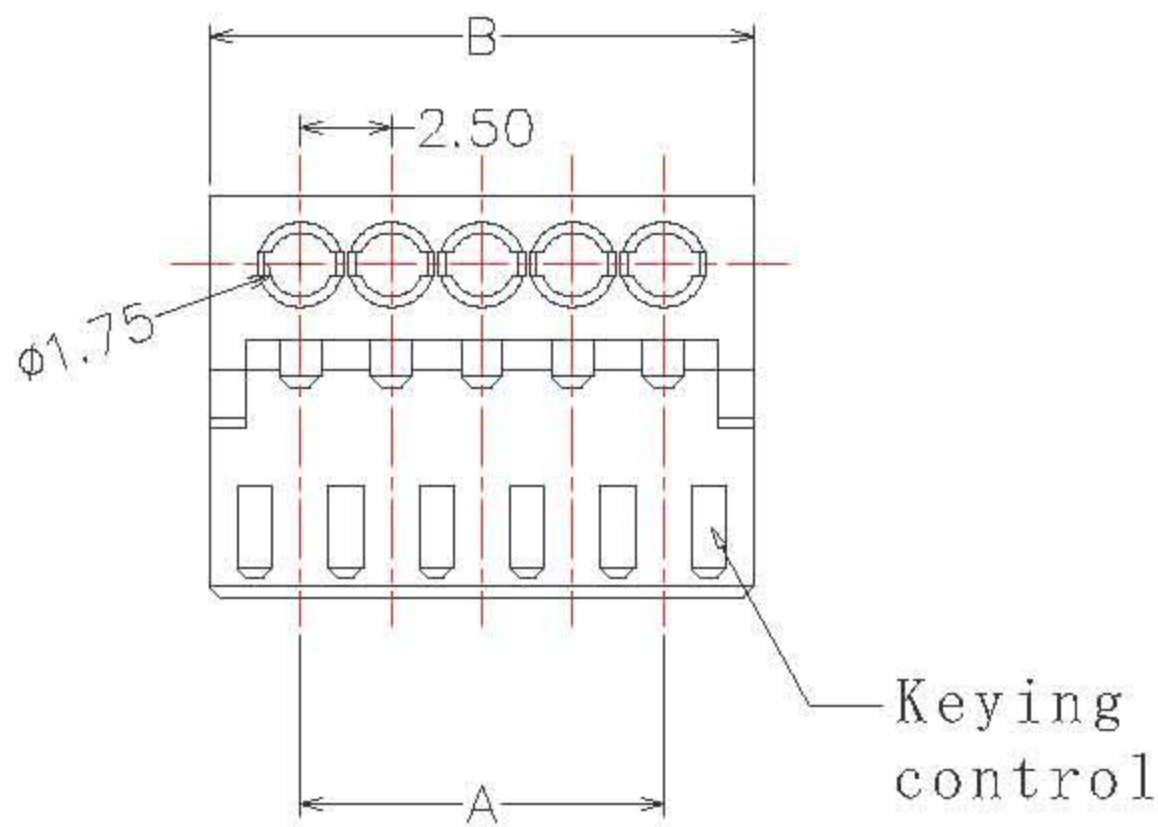



# M7281

## SPECIFICATION

Current rating: 3AAC, DC  
 Voltage rating: 32VAC, DC  
 Operating Temperature: -40 °C--+120 °C  
 Contact Resistance: 10mΩ max.  
 Insulation resistance: 1000MΩ min.  
 Withstanding voltage: 1400V AC/minute  
 Material: Housing:Nylon66 UL94V-0  
 Terminal: Phosphor bronze, Tin-plated  
 Wire range: AWG 24 to 22  
 GWT:750 °C IEC-60335-1

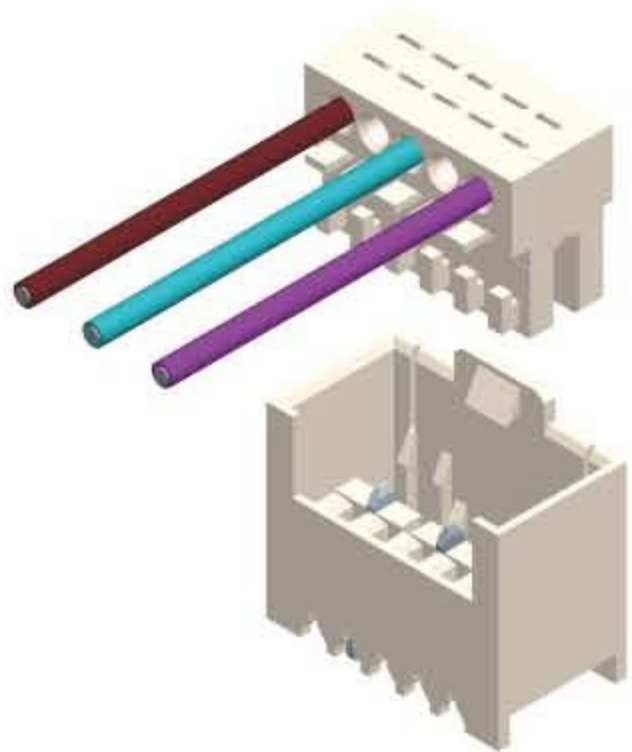

Dimension		
Pos. No.	A	B
3	5.0	10.0
5	10.0	15.0
7	15.0	20.0
9	20.0	25.0
11	25.0	30.0
13	30.0	35.0
15	35.0	40.0
17	40.0	45.0
19	45.0	50.0

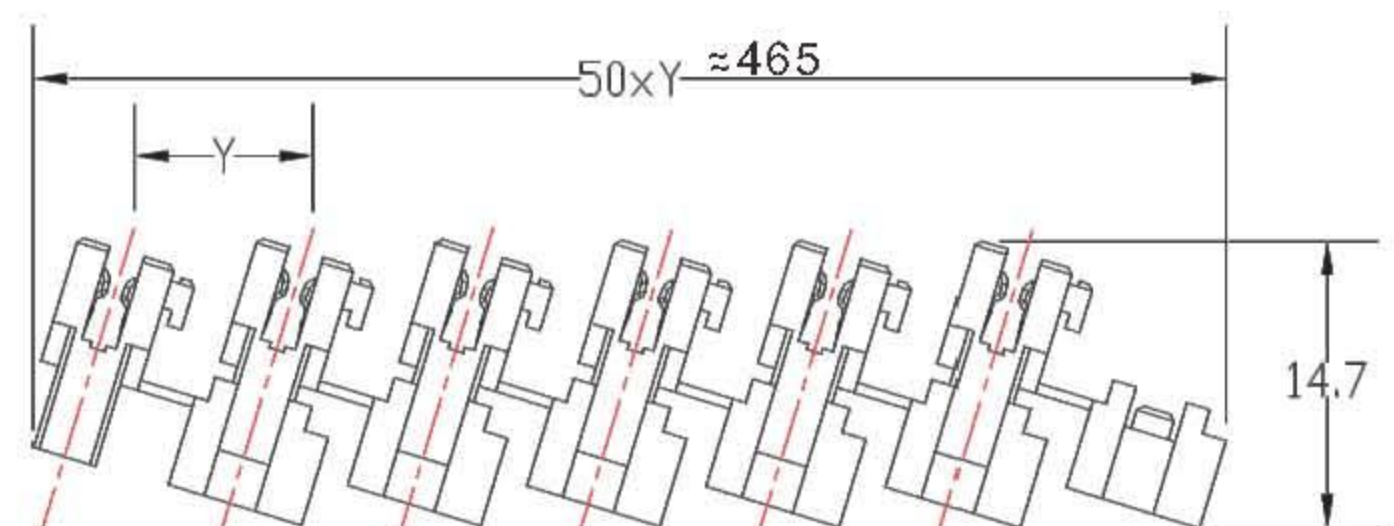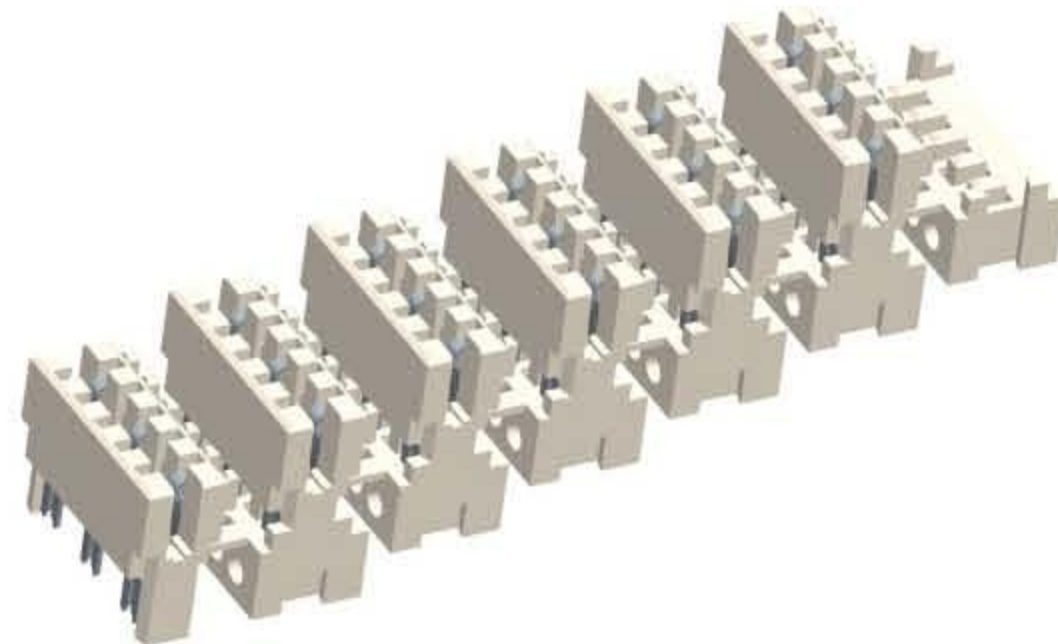

## M7281 Part Number Definition

M7281-X-XXX-X(X)

